

HDHMR DOOR

HIGH DENSITY HIGH MOISTURE RESISTANCE


new trend

ABOUT HDHMR DOOR

“HDHMR Door” is the latest avatar for **Door Industry**. This novel application will add wings to your Doors in both commercial and residential segment. Inheriting the desirable properties viz. strength, durability & innovative application “HDHMR Door” is the best available substitute of Flush Doors & Traditional Doors. Manufactured by using the finest and strongest wood fibres of eucalyptus hard wood and best quality glue made in-house enhances the desired product performance.

* For dimension please refer size Matrix

Thickness : 30mm & 32mm

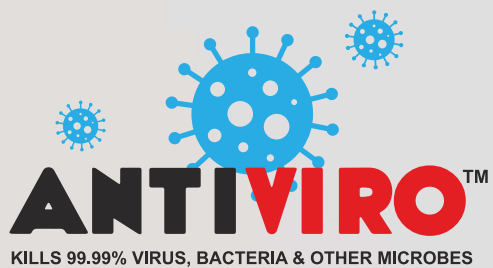

FM5 - 3341
CHOCOLATE ZEBRANO

* For dimension please refer size Matrix

Thickness : 30mm & 32mm

Also
available in



Teak Gold
3091



Sapelli
3015



Straight Grained
Wenge - 3008





FM6 - 3008
STRAIGHT GRAINED WENGE

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

Also
available in



Teak Gold
3091



Sapelli
3015



Chocolate Zebrano
3341

FM7 - 3008

**STRAIGHT GRAINED
WENGE**

Also
available in



Teak Gold
3091



Sapelli
3015



Chocolate Zebrano
3341





EXOTIC TEAK - 3365

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

FIBRE GREY - 3453

* For dimension please refer size Matrix

Thickness : 30mm & 32mm





STRAIGHT GRAINED WENGE - 3008

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

MAHOGANY - 3024

* For dimension please refer size Matrix

Thickness : 30mm & 32mm





FIBRE RUST - 3452

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

REAL WOOD - 3070

* For dimension please refer size Matrix

Thickness : 30mm & 32mm





TEAK GOLD - 3091

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

FIBRE GOLD - 3454

* For dimension please refer size Matrix

Thickness : 30mm & 32mm





OXFORD CHERRY - 3022

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

PERSIAN WALNUT - 3371

* For dimension please refer size Matrix

Thickness : 30mm & 32mm





SAPELLI - 3015

* For dimension please refer size Matrix
Thickness : 30mm & 32mm

TESA PLAIN DOOR VS OTHER FLUSH DOOR

FLUSH DOOR

LOCAL FILLER

LOW SURFACE
STRENGTH

CUTTING
LIMITATION


PRE DEFINE
LOCKING AREA

TOP LAYER WEAR OFF
OVER A PERIOD OF TIME

WAVINESS DUE
TO UNEVEN SURFACE

SURFACE NOT
SMOOTH AS PER
PAINT AND POLISH
REQUIREMENT

ROUTING AND
CNC DESIGN
NOT POSSIBLE

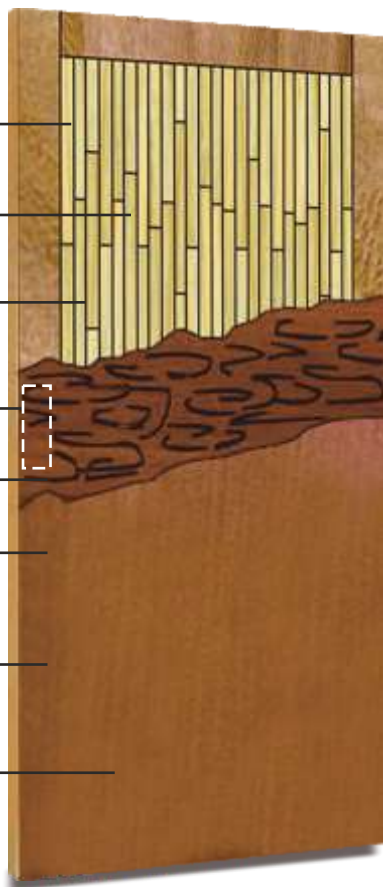

HDHMR DOOR

SOLID SURFACE
NO CORE GAP

HIGHER STRENGTH
ENSURES SAFETY

CAN BE CUT IN ANY SIZE
(HORIZONTAL & VERTICAL)

EASY LOCKING SYSTEM
AS PER REQUIREMENT

NO WEAR OFF PROBLEM

SMOOTH SURFACE
ZERO BUBBLE PASTING

IDEAL SURFACE
FOR PAINT AND POLISH

ROUTING AND CNC DESIGN
AS PER YOUR CHOICE



PRELAMINATED DOOR VS OTHER FLUSH DOOR

POST LAMINATED FLUSH DOOR

PRELAMINATED HDHMR DOOR

TIME CONSUMING
MANUAL PROCESS

LOCAL FILLER

LOW SURFACE
STRENGTH


CUTTING
LIMITATION

PRE DEFINE
LOCKING AREA

WAVINESS DUE
TO UNEVEN SURFACE

UNSTABLE DURING
EXTREME CLIMATIC
CONDITION

HIGHLY COST
EXPENSIVE

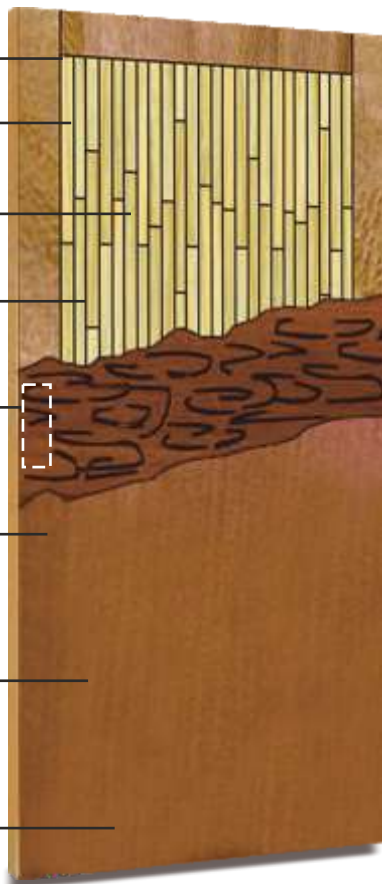

READY TO USE DOORS

SOLID STRUCTURE
NO CORE GAP

HIGHER STRENGTH
ENSURES SAFETY


CAN BE CUT IN ANY SIZE
(HORIZONTAL & VERTICAL)

EASY LOCKING SYSTEM
AS PER REQUIREMENT

SMOOTH SURFACE
ZERO BUBBLE FINISH

ALL SEASON PRODUCT &
DIMENSIONALLY STABLE

COST EFFECTIVE

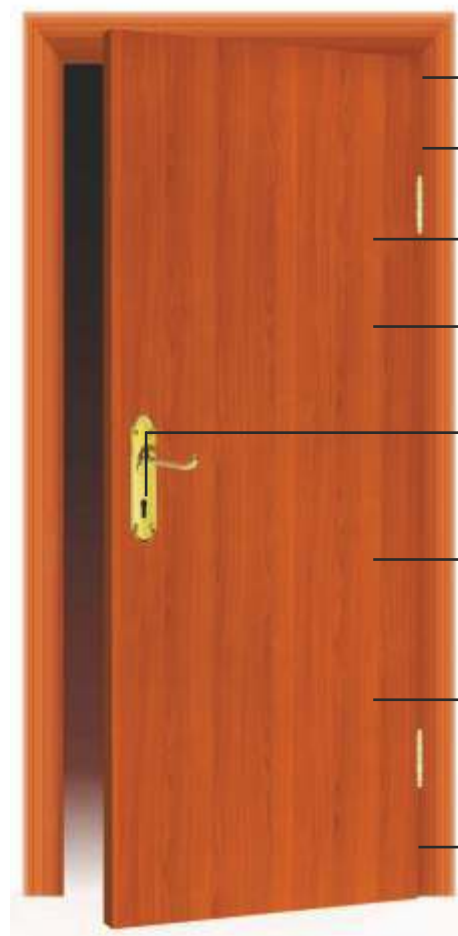




DOOR CARE

instructions

1. HDHMR Doors are produced and packed in an ideal climatic condition, it is recommended that before uses of these doors at consumer end, it must be unpacked and kept on a flat surface with uniform weight to stabilise these doors in local climatic condition for 2-3 days.
2. The minimum Door Frame (Jamb) should be 3"x4" and above for single leaf (single stop).

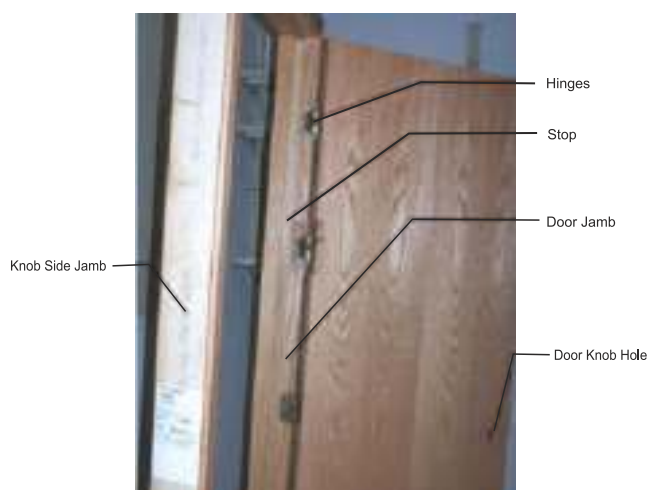

3. Door edges must be sealed properly to restrict door expansion with Edge Banding/Hardwood Lipping/Epoxy/ Acrylic/ PU sealing or painting
4. The final Door size (inclusive of edge banding tape/ lipping or any other seal) should be kept 5 mm smaller from the internal opening of door frame/ Jamb to withstand with climatic changes.

Proper tools must be used for fixing of lock, handle, magic eye, door closer, door stopper, tower bolts etc.

5. It must be ensured that tower bolt and lock must be fixed simultaneously with fixing of hinges, and especially for under construction site care must be taken that the doors are not kept in open hanging position for longer period.

6. It is recommended to fix 4 number of 5 inch long butt hinge (12 to 14 gauge) for the door height up to 7 ft. height and 5 number of 5 inch long butt hinge for the door height above 7 ft.



7. While fixing hinges on door Use counter sunk (CSK) chipboard screw of size 4x 50mm to be fixed with pre drilling of pilot bore of 2.5mm and 50mm depth. Screws must be tightened with proper screw driver with torque limiter to avoid over tightening of screws. Never hammer screws / nails on doors.
8. Hinge position for door up to 7 ft. – first hinge 150 mm from top, second 250 mm from first hinge, third centre of 2nd and 4th , 4th hinge- 150 mm from bottom edge
9. In case, Plain HDHMR Door is being used by customer, proper painting on both side surfaces at same time with epoxy/synthetic/PU/Deco paint or with sealer/primer/paint application.
10. In case, Pre-laminated door is being used by customer, No painting is required. Proper sealing must be done on edges as recommende.
11. For Post Lamination at site, user should ensure



DOOR CARE

instructions

lamination at both sides with same thickness HPL to avoid warpage

12. For Routing/carving/grooving application in door:

Maximum depth of routing should not exceed 8mm.

Routing must be done on both side/ or in case of single side routing, back



side must be grooved with grid size of 5inch x 5 inch or below. The minimum width of such grooves to be 9 mm and depth 5 – 6 mm. (Single side routing results in development of stress from other side which will leads to warpage/ bend)

Sealer coat must be done immediately after routing on both sides

After routing the door must be kept horizontally on flat surface for 1-2 days before fixing on door frame.

Routing to be done leaving at least 125mm from all edges for door up to 3 ft. wide and for door with width above 3 ft. minimum 150 mm to leave, which is structural area in case of routed doors.

13. The HDHMR Door is a wooden product and should be handled, stored and

installed properly to avoid warpage and chipping/damages.


14. The HDHMR Door is strictly for internal usage; do not expose these doors to direct sunlight or rain.

Note: Warping / twist/ buckling are within the norms of IS:2202- 1999. (The pre-condition stated all above should be strictly followed)



PRELAM DOOR ADVANTAGES

- Ready To Use Doors
- Solid Structure - No Core Gap
- Best Finishing, Unique And Rich Look
- Calibrated Panel With No Thickness Variation
- No Warping Problem
- All Season Product & Dimensionally Stable
- Cost Effective
- Zero Bubble Finish

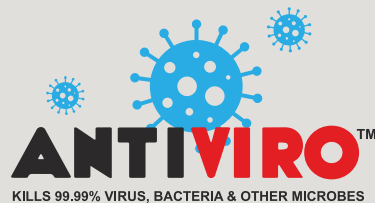

Hinges Recommended for upto 35mm Doors

Type	- Steel Butt Hinges
Size	- 5 inch
Thickness	- 1.5 - 2.5mm (12 -14 gauge)
Screw Dimension	- 4mm x 50mm
Shape of Screw Head	- Countersunk
Screwdriver Shape	- Philips
7ft Door	- 4 pc of Hinges
8ft Door	- 5 pc of Hinges
Weight Loading capacity	- 50kg - 60kg each

Note: Before screwing, First make Pilot hole with drill 2.5mm bit for Chipboard Screw CSK 4 x 50mm
Please make sure that screw should be properly fastened in all holes of hinges.





TESA PLAIN DOOR WITH CNC DESIGN





TESA PLAIN DOOR WITH CNC DESIGN



TESA DOOR ADVANTANGES



**HIGHER
DENSITY**



**TOUGHER
THAN PLYWOOD**



**NOMINAL
COST**



**HIGHLY WATER
RESISTANCE**



**HIGHER SCREW HOLDING
STRENGTH IN CORE**



**ZERO BUBBLE
FINISH**



**MULTIDIMENSIONAL
BONDING TECHNOLOGY**



**ENVIRONMENT
FRIENDLY**



Made from wood fiber



**IDEAL ROUTABLE
SUBSTRATE**



**BORER
RESISTANCE**




**TERMITE
RESISTANCE**




**FUNGAL
RESISTANCE**



**NO SPLINTERS/
CHIPING**



 HDHMR Screw withdrawal strength (kg)		
Edge	Face	
TESA HDHMR Board	>350	>450
Plywood	>200	>325

PLYWOOD	HDHMR
DENSITY around 650 - 750 Kg/m ³	DENSITY More than 850 Kg/m ³ resulting in better compactness and strength





Manufactured & Marketed By :-
Balaji Action Buildwell Pvt. Ltd.

Regd. Office : G-11, Udhog Nagar, Peeragarhi, New Rohtak Road, North West Delhi, Delhi - 110 041
Ph.: 011-41120000, 41120020

Plant : Plot No. C34, C34 (A) to (D) , C3, C6 (A) to (C), Eldeco SIDCUL Industrial Park, Sitarganj, Distt.
Udham Singh Nagar, Uttarakhand - 262405

CUSTOMER CARE SERVICE: 1800 309 07 07
customerservices@actiontesa.com



**DOWNLOAD THE
TESA CONNECT APP
ON YOUR MOBILE
SCAN THE QR CODE** ▶

